Find us on: Facebook, Google+ & YouTube

RE-TOOL YOUR METAL SHOP

THIS SPRING & SUMMER **Proudly Canadian**





7" X 12" METAL CUTTING BANDSAW

KC-712BC

• 11.5 Amp. motor • Coolant system



(S) and Leads	H.S.S. & BI					100°	TH")
and the same of	Model	Length	Width	Blade Material	TPI	Thickness	Price
	KBB-712-10	93"	3/4"	H.S.S.	10	.032"	\$19.99
()	KBB-712-14	93"	3/4"	H.S.S.	14	.032"	\$19.99
Manager 1	KBB-712-18	93"	3/4"	H.S.S.	18	.032"	\$19.99
(KBB-712-BM-610	93"	3/4"	Bi-Metal	6-10	.032"	\$59.99
The second second	KRR-712-RM-1014	Q3"	3/4"	Ri-Metal	10.14	032"	\$59.99



KING

Θ



MILLING DRILLING MACHINE with SAFETY GUARD & LIMIT SWITCH

PDM-30

- 16 1/2" swing • 1 1/4" Drilling capacity
- 3" Face mill capacity
- 5" stroke
- Spindle taper R8
- 12 speeds (150-2500 RPM)

MILLING DRILLING MACHINE STAND \$279.99 SS-45 Heavy-duty stee construction

SP&CUTTER HOLDERSES

HSS cutte

KM-046 3/8" Shank \$59. Fits: KC-0712ML KC-1022ML, KC-1620CLM



Two powerful 3/4 HP 110V motors · Lathe chuck and drill chuck safety

guards with limit switch protection and standard tool post safety guard Comes with 5"- 3 jaw chuck, imperial & metric change gears, quick change fool post with 1/2" capacity, steady

rest, follow rest, thread chasing dial indicator, MT#3 & MT#4 dead centres, 1/2" drill chuck and tool box

with adjusting tools \$2999

RETRAGIABUTAIR HOSE RELWITH HYBRID POLYMERAIR HOSE

K-5038FRL 50 ft. x 3/8"

\$799.

KING

STATIONARY

6.5 PEAK HP

AIR COMPRESSOR

60 GALLON

KC-6160V1 • 150 PSI max pressure • 13.4 CFM @ 40 PSI • 11.2 CFM @ 90 PSI · High efficiency reed valves

All-Weather Flexibility (-40°C to 65°C)
 Comes with wall mounting hardware

MANUALAIR HOSE REELWITH HYBRID POLYMERAIR HOSE

K-10014FRL 100 ft. x 1/4"

All-Weather Flexibility (-40°C to 65°C)

• 360° swivel base





ARGIII GI FUEX



7		RID POLY <i>N</i>	
	INDUS	TRIAL AIR F	IOSES
	K-2514H	25'x1/4"	\$19.99
3	K-2538H	25'x3/8"	\$26.99
)	K-5014H	50'x1/4"	\$29.99
,	K-5038H	50'x3/8"	\$39.99
	K-10014H	100'x1/4"	\$49.99
	K-10038H	100'x3/8"	\$59.99





29 PC. TITANIUM DRILL BIT SET KDB-29T

117" DRILL PRESS

117 DRILL PRESS WITH SALITY



- 12.5 Amp. motor
- 16 speeds 240-3400 RPM)
- 17" swing 3 1/4" stroke
- 5/8" chuck

• 16 speeds (240-3400 RPM) 17" swing • 3 1/4" stroke • 5/8" chuck



3" X 79" METAL BELT SANDER

KC-379MS

- Sanding belt rotates on 7-1/2" vented drive wheel and solid rubber rear wheel for maximum tracking and sanding control
- · Head pivots up or down on base for easy and safe work heights
- Horizontal working height of 36"
- Comes with 80 Grit pure zirconia sanding belt







MAGNETIC SWITCHES

KMAG-110-811	110V (8-11 Amp.)
KMAG-110-1114	110V (11-14 Amp.)
KMAG-110-1417	110V (14-17 Amp.)
KMAG-220-811	220V (8-11 Amp.)
KMAG-220-1114	220V (11-14 Amp.)
KMAG-220-1417	220V (14-17 Amp.)
KMAG-220-1721	220V (17-21 Amp.)







DIGITAL FRACTIONAL CALIPER KM-106

- · Converts to inches (decimal and fractional) and metric readings
- Waterproof to IP54 standards • Two 3V Lithium batteries included



FIREPROOF 3"METAL DUST COLLECTION HOSES KIT

KM-102 Kits Includes: 2 - 8ft. (2.5M) 130°) Fireproof hoses 4 - Wire hose clamps (3")

\$69.99



2 HP **METAL DUST COLLECTOR**

KC-7300C

- Powerful 2 HP, 220V motor
- 2 Step activation safety switch with line voltage interruption in case of power failure
- · Ideal for collection of metal chips and abrasive dust produced by metal sanders, grinders, cold cut saws, deburring and chamfering machines
- · Large metal chips colection drawer is easy to access and clean
- 6" inlet with Y-inlet adaptor with two 3" dust inlets allowing up to connect up to two metalworking machines

\$1349.





WET/DRY SHARPENER

KC-4500S

12" HEAVY-DUTY BENCH GRINDER WITH FLOOR STAND

1720 RPM

KC-1295

Robust cast-iron wheel guards and dust vents with





3

KING

METAL FORMING MACHINES



- Max. length 50"Capacity 16 GaugeWeight 540 lbs

KC-S3622

- Max. length 36"Capacity 22 Gauge
- Weight 176 lbs

659

KC-S2422

- Max. length 24" Capacity 22 Gauge
 Weight 81 lbs



FLOOR MODEL BOX AND PAN BRAKE

KC-BP4812



12" HAND **SHEAR**

KC-HS12

- Level arm with
- compensating springEasy cutting across the entire length
- Rigid cutter body

\$199.99

4 TON HAND NOTCHER

KC-N616

- Heavy cast-iron construction
- 16 Gauge notching capacity (mild steel)
- 18 Gauge piercing capacity (mild steel)
- Maximum notch (6" X 6" x 90°)
 Weight 165 lbs

\$699

SHEAR, BRAKE AND ROLL

KC-1220

- Max. length 12"
- Maximum thickness
- 20 Gauge Weight 95 lbs

459.

KC-3020

- Max. length 30"
- 20 Gauge
- Weight 300 lbs

\$899

KC-4020

- Max. length 40"
- Maximum thickness
- 20 Gauge Weight 387 lbs



METAL FORMING MACHINES









Fits 5/8" table slo



99

Switch

Capacity

MT#3

6 Speeds (60-1500 RPM)

Face Mill

Fnd Mill

Capacity 4"

capacity 3/4"

1 1/4" Drilling

20 7/16" Swing

Spindle Taper

4" - KCV-4N \$59.99

5" - KCV-5N \$99.99 6" - KCV-6N

KEYLESS DRILL CHUCKS



Switch

• 1 1/4" Drilling

• 20 7/16" Swing

Spindle Taper R-8

Capacity

6 Speeds (60-1500 RPM)

• Face Mill

Capacity 4"

End Mill capacity 3/4"

· Working surface of

table 23"x 7 1/2"

\$79.99 \$119.99 KCT-512 KDC-58X KDC-34X 5/8"-JT#3 3/4"-JT#4 1/2" T- slots

COMPOUND SLIDE TABLES

END MILL SET KM-120 TITANIUM ' NITRIDE COATED HIGH \$169.99 \$199.99 KCT-618 2 & 4 Flute (10pcs. each) 6" X 18 1/2 1/2" T- slots Imperial, Single End

7" stroke

(60-870 / 120-1740)

• 1 1/2" capacity

 Spindle taper MT#. • 5/8" Chuck &

1999

20 PC. TITANIUM COATED

key included

Speeds





Fits Models: KC-0712ML, KC-1022ML KC-1236ML, 14440ML-6

Fits Models: KC-1640GH, KC-1640ML KC-1660GH

LIVE CENTERS



TAPER SHANK - MT#2

KLC-3M TAPER SHANK - MT#3 Very

PER'ATTACHMENT



These Taper Attachments are designed to fit our 12" x 36", 14" x 40" & 16" x 40" Metal Lathes models

KC-1236ML, KC-1440ML-6 & KC-1640ML

PC. QUICK CHANGE OL'POST_'KITS



KQCT-0012 Fits most lathes up

to 0 to 12" swing KQCT-1015

Fits most lathes between 10" to 15" swing

KQCT-1318 Fits most lathes between

FAGOR DIGITAL READOUT SYSTEM





20i-T-840 (Fits KC-1440ML-6 & KC-1440ML-2)

2/XXISwith

2/XXISwith 10" x 40" scales

20i-T-1040

(Fits KC-1640ML)

METAL LATHES & ACCESSORIES 7" X 12" VARIABLE SPEED MINI METAL LATHE

545/Amps (110V)

KC-0712ML

- 3/4" spindle bore
- Variable speeds 2 (0-1100, 0-2500 RPM)
- Comes complete with quick change gear box, face plate, steady rest, replacement gears, 4-way tool post, MT#2 dead center, threading dial indicator, 4"- 3 jaw chuck, emergency stop button, chuck key and hex. keys

10" X 22" BELT DRIVE METAL LATHE

KC-1022ML

- 1" spindle bore
- Spindle speeds 6 (150-2400) RPM
- Comes complete with 5"-3 jaw chuck, 6-1/2"-4 jaw chuck, replacement gears, 4 way tool post, steady rest, follow rest, 8" face plate, thread chasing dial indicator, MT#3 dead center, full length splash guard, tool box, chuck key and hex. keys





12" X 36" GEARHEAD METAL LATHE

- 1 1/2" spindle bore
- Spindle speeds 9 (60-1500) RPM
- 40(4-112 T.P.I) 30(.2 4.5mm) thread cutting
- Comes complete with 6"-3 jaw chuck, 8"-4 jaw chuck, imperial and metric gears, quick change tool post, steady rest, follow rest, 10" DI-4 camlock face plate, thread chasing dial indicator, MT#3 dead center, MT#3 arbor taper, 1/2" drill chuck, full length splash guard, tool box, chuck keys and hex. keys

KC-1236ML/SS-1236



WITH TAPER ATTACHMENT

KC-1236ML/KM-053/SS-1236



⊕

14" X 40" GEARHEAD METAL LATHE

- Spindle speeds 8(70-2000 RPM)
- 34(4-56 T.P.I) 26(.4 7mm) thread cutting
- Comes complete with 6"-3 jaw chuck, 8"-4 jaw chuck, replacement gears, quick change tool post, steady rest, follow rest, 12" DI-4 camlock face plate, coolant system, full length splash guard, thread chasing dial indicator, 2 MT#3 dead centers, JT#5-MT#3 sleeve, chip tray, tool box, halogen lamp, chuck keys, hex. keys, and cabinet stand with foot brake

KC-1440ML-2

KC-1440ML-2/KM-054

2" Spindle Bore

CABINET STAND WITH **FOOT BRAKE INCLUDED**

16" X 40" HIGH PRECISION "TOOL ROOM" METAL LATHE

- Spindle speeds 16(45-1800 RPM)
- 2" spindle bore diameter
- 45(2-72 T.P.I) thread cutting
- Comes complete with 8"-3 jaw chuck with inside & outside jaws, 12"-4 jaw chuck, quick change tool post and two 3/4" tool holders, steady and follow rests with roller guides, 14" (D1-6) camlock face plate, MT #4 standard dead centre, MT #4 carbide tipped dead centre, MT #4 to MT #6 spindle sleeve adapter, halogen light, coolant system, full length splash quard, manual micrometer carriage stop, tool box and wrenches

KC-1640ML

KC-1640ML/KM-055





CABINET STAND WITH **FOOT BRAKE INCLUDED**



METAL CUTTING BANDSAWS

$5'' \times 6''$ METAL CUTTING **BANDSAW**

KC-129C


- 3 speeds (80-120-200 FPM)
- Comes with wheels for portability




10" x 18" METAL CUTTING BANDSAW

KC-227-2 (220V) KC-227-6 (600V)

- 4 speeds (114, 196, 288, 377 FPM)
- Carbide ball bearing blade guide
- Centralized control panel and automatic shut-off
- Adjustable hydraulic downfeed control
- To ensure reliable accurate cuts, both adjustable control arms can be positioned as close to the cut as possible





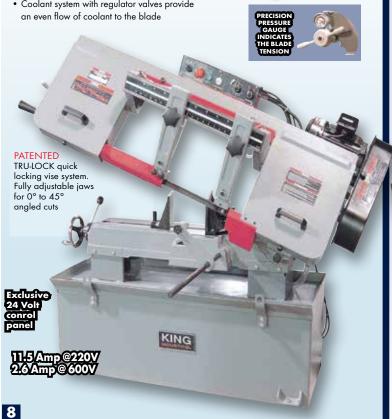

5" x 6" DUAL SWIVEL METAL **CUTTING BANDSAW**

KC-129DS

 Head swivels 0° - 45° to the right and 0° - 60° to the left

 Adjustable hydraulic downfeed control

Automatic shut-off switch

Adjustable ball bearing guides

• Portable design for easy movement







METAL CUTTING BANDSAW

KC-228S-V-2 (220V) KC-228S-V-6 (600V)

• Variable Speeds (73-312 FPM)

• Carbide ball bearing blade guides

Adjustable hydraulic downfeed control

Swivel base from 0° to 45° Coolant system with regulator

valves provide an even flow of coolant to the blade

 Length
 Width
 TPI
 Thickness

 122"
 1"
 6-10
 .032"





METAL CUTTING BANDSAWS

7" x 12" METAL CUTTING BANDSAW WITH GEAR DRIVE

KC-712GH-5

- Returning coolant system3(110-230-340 FPM)
- Automatic shut-off
- Adjustable ball bearing guides

PATENTED GEAR DRIVE SYSTEM...

is the ONLY one in the Canadian market which allows the user to change speeds without stopping the machine.



$7'' \times 12''$ DUAL SWIVEL METAL CUTTING BANDSAW KC-712DS

- Returning coolant system4 speeds (98-164-246-328 FPM)
- Automatic shut-off
- Adjustable ball bearing guides





9"x 18" METAL CUTTING **SWIVEL BANDSAW**

KC-918S-V

- Speeds (80-250 FPM)
- Carbide ball bearing blade guides with rollers
- · Centralized control panel and automatic shut-off
- Adjustable hydraulic downfeed control
- Precision blade tension adjustment
- Head swivels 0° to 45° in one direction



17" VARIABLE SPEED METAL/WOOD CUTTING **BANDSAW**

KC-1700WM-VS

- Variable speeds (wood): 540-3600 SFPM
- Variable speeds (metal): 100-650 SFPM
- Voltage (input power): 220V, 1 phase, 60 Hz
 Comes with a 1/2" x 6 TPI wood cutting blade, 1/2" x 10 TPI metal cutting blade, laser guide, work lamp, miter gauge and a precision "TRU-RIP" aluminum rip fence with resaw guide

18" METAL CUTTING **BANDSAW**

KC-450

- Variable speed
- Handwheel controls speed
- Speed changes while the machine is in operation
- Comes complete with 4-way tilting table, and work light



GASOLINE WATER PUMPS

KCG-2PGN-7

• 92' Total head lift (total height at sea level, to which water can be raised above original water level)

· Oil sensor shuts off engine when oil level is low

 Comes with 3 wire clamps, 4 hose adaptors, 4 rubber aaskets, strainer basket and strainer basket adaptor





ASOUNEENGI

· Ideal for compressors, generators, pressure washers, go-karts and log splitters

· Counterclockwise drive shaft direction

KCG-65 Powerful 6.5 HP 4 stroke air cooled OHV engines

89.99





TER PUMP HOSE KITS

Each hose kit comes with a type A threaded camlock adaptor

CLEAR PVC REINFORCED SUCTION HOSES

FLAT PVC DISCHARGE HOSES



\$99.⁹⁹\$169.⁹⁹ \$69.⁹⁹ \$99.⁹⁹

KW-252 KW-253

2" X 25 ft 3" X 25 ft

(-50°C~550°C)

(-58°F~1022°F)

KW-503 KW-502 3" X 50 ft 2" X 50 ft

JUMP STARTER / **PERSONAL POWER SUPPLY**

PX-500

 Charge or power all electronic devices, USB 5V electronics, 12V accessories and 16V/19V laptops.

This 13,600 mAh portable jump starter & power supply is able to jumpstart a V8 engine (5L) up to 15 times.









AND TRUCKS

POWER OR CHARGE **DEVICES**

4-in-1 USB CABLE FOR PX-500 KM-500



| Length | Width | TPI | Thickness | Price | 1014 | 44 7/8" | 1/2" | 10-14 | .020" | \$17.9



\$149.99



INSPECTION CAMERA WITH **LCD MONITOR** KC-9050 Kit includes: Camera handle

9mm dia. x 39" flexible camera probe

• 2.4" diagonal TFT-LCD color monitor, • Kit comes with 3 accessory tools

(45° mirror, magnetic pick-up, pick-up hook) and 4 AA batteries

4.5MM CAMERA PROBE FOR **INSPECTION CAMERA**

\$9

9,99

KW-9123

4.5mm diameter x 39" flexible-obedient camera probe waterproof to IP67 standards

· LED lights inside the camera probe tip illuminate dark spaces

WIRELESS INSPECTION CAMERA WITH RECORDABLE **LCD MONITOR**

KC-9200 DIGITAL Kit includes: ZOOM Camera handle, 3X 39"x 9mm camera probe, 39" x 10mm camera probe extension, 3.5"

TFT-LCD wireless color monitor, monitor Li-ion charger, 3 accessory tools (45° mirror,

icessory tools (45° mirror, magnetic pick-up, pick-up hook), \$199,99 USB and Video cables, 4GB SD

PORTABLE & GASOLINE GENERATORS











950W PORTABLE GENERATOR

KCG-951G

- Powerful 2 HP, 2 stroke air cooled motor
- · Brushless alternator and electronic ignition Outlet: 120V/6.7 Amp. AC output
- Outlet: 12V/5.3 Amp. DC output
- AC and DC circuit breakers and reset buttons for safe operation
- Comes with DC cables and spark plug socket

1500W GASOLINE GENERATOR KCG-1501GN

- Powerful 3 HP, 4 stroke air cooled motor
- Electronic ignition
- Low oil shut-off with indicator light protects the engine
- Duplex Outlet: 120V/10 Amp. AC output
- Terminals: 12V, 8 Amp. DC output
- · Easy start recoil starter
- AC and DC circuit breakers for safe operation
- Comes with DC cables and spark plug socket

4200W GASOLINE GENERATOR WITH WHEEL KIT

KCG-4200G

- Powerful 7 HP, 4 stroke air cooled motor
- AVR system and electronic ignition
 Low oil shut-off with indicator light protects the engine
 Duplex outlet: 120V/20 Amp. AC
- Twist lock outlet: 120V/240V/30 Amp. AC
- · Easy start recoil starter
- Voltage switch and ground terminal
- AC double throw circuit breaker and resets for safe operation
- Wheel kit includes 8" wheels and pivot handle

6500W GASOLINE GENERATOR WITH WHEEL KIT

KCG-6501G

- Powerful 15 HP, 4 stroke air cooled motor
- AVR system and electronic ignition
- · Low oil shut-off with indicator light protects the engine
- Duplex outlet: 120V/20 Amp. AC
- Twist lock outlet: 120V/240V/30 Amp. AC
- AC double throw circuit breaker and resets for safe operation

8500W GASOLINE GENERATOR WITH ELECTRIC START & WHEEL KIT

KCG-8500GE

- Powerful 15 HP, 4 stroke air cooled motor
- AVR system and electronic ignition
- Low oil shut-off with indicator light protects the engine
 Two duplex outlets: 120V/20 Amp. AC
- Two twist lock outlets: 120V/30 Amp. and 120V/240V/30 Amp. AC
- Keyed electric start and easy start recoil starter
- AC double throw circuit breaker and resets for safe operation

10000W GASOLINE GENERATOR WITH ELECTRIC START & WHEEL KIT

KCG-10000GE

- Powerful 15 HP, 4 stroke air cooled motor
- AVR system and electronic ignition
- Low oil shut-off with indicator light protects the engine
- Two duplex outlets: 120V/20 Amp. AC
- Two twist lock outlets: 120V/30 Amp. and 120V/240V/30 Amp. AC
- Keyed electric start and easy start recoil starter AC double throw circuit breaker and resets
- for safe operation

2000WGASOLINE



KCG-2001i

- Sine wave digital inverter generator provides stable current to power voltage-sentitive electronics
- Powerful 3 HP, 4 stroke air cooled OHV engine DC output for charging smartphones, tablettes or any USB powered equipment
- DC Cigarette Lighter Socket: 12V/8 Amp DC output
- AC Duplex Outlet: 120V/13.3 Amp AC output





Optional K-X2P

Parallel Cable Kit for connectivity hetween two inverters



- water flow Thermal relief valve on pump to
- protect against overheating 25' high pressure hose and inlet hose quick connect
- coupling Comes with 10" pneumatic wheels for portability and 4 quick connect nozzles (0°, 15°

25°, 40° and detergent)

771172

GENERATOR EXTENSION CORDS

Converts a Nema L14-30P 240V 30 Amp Twist Lock plug into Nema 5-15/20R 120V 20A receptacles

K-L1430-10

Extension cord length: 10 feet Gauge (AWG)/Cord: 12 (SJTW 4/C) Number of 120V plugs: 4

\$29.99

K-L1430R-25 Extension cord length: 25 feet Gauge (AWG)/Cord: 10 (SJTW 4/C) Number of 120V plugs: 4

\$74.99

K-L1430-25-4T

Lighted Extension cord length: 25 feet Ligh Gauge (AWG)/Cord: 10 (SJTW 4/C) End Number of 120V plugs: 4

S74.99

RV GENERATOR ADAPTER

vehicles that use typical RV extension cords

