USE WHAT THE PROS USE! Spring & 2 HOLMESOHOLMES f you missed an episode of Holmes+Holmes, watch it on the HGTV Canada website: CFX48FBHFA 12FDEGSANDERS KING \$40 SAVINGS Facebook, Google+ NEW Powerful 1.5 HP. & YouTube 110V/220V motor 4" dust chute for dust collector hook-up (KC-790FX only) 14"WOOD CUTTING 12" INDUSTRIAL JOINTER/PLANER Comes with aluminum miter **BANDSAW WITH RIP** WITH SPIRAL CUTTERHEAD gauge, cast-iron work stop, T-slot centre point, enclosed stand and **FENCE AND RESAW** adjustment hex, keys GUIDE KC-790FX A spiral cutterhead makes 50% less noise
 Magnetic safety switch **BONUS** \$1349. KC-1433FXR • 10 amp. motor • 14" x 14" cast Large 43" x 6" aluminum extruded fence pivots 0-45° Large 43 X O auditinuiti extraores from the cutter inserts, 2 T25 Torx screwdrivers and adjustment hex. keys SYSTEM WITH RESAW iron table KC-790FX-DC • 3 speeds (735-GUIDE RF-1433R 1470-2350 FPM) ⊕ 59 Miter gauge · Dust chute Hinged doors **Dust Collector Bag** KDCB-790 KING chutes The Most Innovative **Drill Press** WOOD CUTTING BANDSAW BLADES 18" ROLLING TOTE TOOL BAG **WERL** | Length | Width | TPI | Thickness | Price | 93" | 1/8" | 14 | .025" | \$19.9 Model KC-18RTB DVR with Adaptive ControlTM Software • 600 Denier water-resistant KBB-1414-6 KBB-1436-10 6 .02 (0) material for all weather use 18 storage pockets and 2 rear 18" NOVA VOYAGER mounted measuring tape loops Heavy-duty wheels and telescopic DVR DRILL PRESS handle for easy transportation 58000 PAR: KING INDUSTRIAL 105" RISER BLOCK BLADES Powerful direct drive 1.75 HP high torque motor OPTIONAL KW-049 Model Width TPI Thickness Price with no pulleys or belts to cause vibration NEW Spindle taper MT #2 (BB-10514-6 1/4" .025 Digital Variable Reluctance KBB-10538-6 3/8" KBB-10512-4 1/2" .025 (DVR) Direct Drive Technology with Adaptive ControlTM Software Comes with 5/8" drill chuck **NEOPRENE WHEEL PROTECTOR FOR** & key, firmware USB cable, 14" WOOD BANDSAWS knock-out wedge, adjustment KW-094 OVERARM BLADE COVER wrench and hex. keys SYSTEM WITH DUST COLLECTION 10" CABINET TABLE SAWS Riving knife system for maximum operator safety
Table has "1" slots for miter gauge and beveled front edge
Magnetic safety switch
Comes with 10" x 40 tooth carbide tipped saw 5 LIP 1-1/47 INDUSTRIAL SHAPER WITH DIGITAL READOUT Transparent blade cover with built indust collection to maximize the collection of saw dust XI-1014 KC-366SH Θ blade, cast-iron miter gauge, standard and dado Spindle travels a full 4' inserts, push stick, storage hooks and hex. keys • Full revolution of handwheel gives an 1/2" VACUUM HOSE exact 1/16"adjustment exceusior. (<mark>|T</mark> KW-161 Comes with 3/4" and 1-1/4" interchangeable spindles, 1/4" and 1/2" router bit adapter mite gauge, feather boards, draw KC-10KX/U30 bar, starter pin and TRU-RIP **OPTIONAL Melamine Extension Industrial Rip Fence systems** able Kit EXT-5052 Comes with 2 support legs KC-10KX/U50 52" RIP Fits: KC-10JCS, & KC-26FXT, KC-10KX NEW HEAVY-DUTY UNIVERSAL mobile base FOR TABLE **SAWS** KMB-1390X

## 50)FT-/5/SAMSUNG™ LED/STRING/LIGHT

- Temporary string lighting with 5 high intensity Samsung<sup>TM</sup> brand LED lights in 10 feet increments
- 50 foot 18 AWG /3 conductor grounded SJT power cord
- 2500 Lumens
- 75 linear feet of coverage at
- Waterproof to IP44 standards



## 5 LAMP STRING LICHT WITH METAL CACES

- K-5012-5LST
   5 molded light sockets in 10 feet increments
- Heavy-duty 12 AWG /3 conductor grounded SJTW cord
   Comes with linkable molded 15A male
- and female ends and metal lamp cages









## **新賀賀** LED WORK LIGHTS

## 20W Work light emits 2200 lumens

KC-2202LED-C Comes with magnetic base

## 10W Worklightemit 1200 lumens

KC-1202LED-C 10W Work light emfits 1200 lumens

\$129,99 KC-1201LED





KC-3602LED-ST

**S**199,%

KC-2402LED-ST





# DRYWALL AND PANEL LIFT

- Hangs drywall in sizes up to 4 ft. x 16 ft. on any ceiling or wall up to 11 ft. high
- Tripod foot brake keeps drywall lift in position during use
- Easy to assemble and disassemble, can be placed in car trunk



## HIGH FREQUENCY OSCILLATING MULTI-TOOL KITS & accessories

- High frequency oscillating action without kickback
- · Each kit includes a sanding back-up pad with hook and loop backing, 24 sanding papers (60, 80 and 120 grit) with hook and loop backing, 35mm Tru-cut narrow offset saw





KW-4808

KW-4816



KW-4817



KW-4818



KW-4804



KW-4805





KW-4806





### VEATHER HEAVY-DUTY (-40°C to 60°C) 12/3 Length AWG Color Mode

KW-4819

| 111000 | 1/ O 510 1T DD                                                                                        |     | /-   |        |       |  |  |  |
|--------|-------------------------------------------------------------------------------------------------------|-----|------|--------|-------|--|--|--|
|        | K-2512-1T-RD                                                                                          | 25' | 12/3 | RED    | 23.99 |  |  |  |
|        | K-2512-1T-OR                                                                                          | 25' | 12/3 | ORANGE | 23.99 |  |  |  |
|        | 15A 125V, 1675W For indoor and outdoor use     Ultra flexible / High visibility colors / Lighted ends |     |      |        |       |  |  |  |
|        | K-5012-1T-YE                                                                                          | 50′ | 12/3 | YELLOW | 44.99 |  |  |  |
| 02     | K-5012-1T-RD                                                                                          | 50' | 12/3 | RED    | 44.99 |  |  |  |
| 8.0    | K-5012-1T-OR                                                                                          | 50' | 12/3 | ORANGE | 44.99 |  |  |  |
| -627   | K 5012 1T CN                                                                                          | ΕCV | 10/2 | CDEENI | 44.00 |  |  |  |

Fits: 8520LP, 8530LP 8531LP-B, 8540LST



## drum capacity is designed to mix two 90 lbs bags of dry cement or mortar mix with water • Enclosed 1/3 HP motor

KC-15CM-2

3.5 cubic feet

- Belt driven motor and
- reduction gear drive



PORTABLE CEMENT MIXER

## 2"DRILLING & MIXING KIT

### KC-8316

- 0 600 RPM 9 Amp. motor
- Variable speed trigger with lock-on button
- Double gear reduction for added torque
- Rear D-handle rotates 360° • Comes with 1/2" chuck, 3
- galvanized mixing paddles (10mm hex. shank), wrench and sturdy carrying case



## BISCUIT JOINER KIT

### KC-8306

- Motor: 7 Amp. 10,800 RPA
- Robust fence with 0 to 90° and 90° to 135° tilt adjustments with positive stops at 45° & 90°
- 45° location notch allows
- indexing off the outside of a mitered joint
- Kit includes biscuit joiner with 4" carbide tipped blade, dust bag, hex. key and plastic carrying case

## JAMB & UNDERCUT SAW

## KC-8363

- The height of cut is adjustable from flush to 1" above the floor with 1/8" graduated scale
- The depth of cut is adjustable to suit a variety of material thicknesses from 0 - 1-1/4 with an adjustable fence
- Comes with a 40 tooth carbide tipped blade



Replacement Carbide Blade KW-098

Variable speed dial for 0-420 SFPM

PORTABLE VARIABLE SPEED

METAL CUTTING BANDSAW

## 8530LP

- Double filtration system
- Tank water drain Power cord wrap for
- 12 ft. power cord Comes complete with 6 ft. x 1-1/4" hose,





**WET-DRY VACUUMS** 

## 8540LST

- Double filtration system
- Tank water drain Power cord wrap for
- 12 ft. power cord Comes complete with 6 ft. x 1-1/4" hose, 2 pc. extension wand. 40L dust bag, cartridge filter, foam filter, reusable filter, 10" floor sweep and crevice tool

5 PEAK 1 O 40 LITERS GALLON US





cord wrap posts Comes complete with 8 ft. x 2-1/2" flex hose, 2 pc. 2-1/2" extension wand, contoured handle with air control, cartridge filter, foam filter, 14" floor sweep with squeegee insert, gulper tool, crevice tool and hanging accessory storage bag













## TELS PROFESSIONAL SCROUL SAWS

## PROFESSIONAL SCROLL SAW

- Professional quality scroll saw with 1.3 Amp DC motor
  Variable speed (400-1400 strokes/min)
  Tool free blade change system with blade holders which accept standard 5" pinless blades
  Entire head tills up to 30° to the left and




## **DELUXE ROUTER TABLE KIT**

XL-200C

 XL-125- Router Lift • XL-080- Router Table Fence • XL-075- Cast-iron Table

• XL-130- Universal Dust Collection Kit





## **PROFESSIONAL SCROLL SAW**

- Professional quality scroll saw with 1.3 Amp DC motor
  Variable speed (400-1550 strokes/min)
  Tool free blade change system with blade holders which accept standard 5" pinless blades
  Entire head tilts up to 38" to the left and
- up to 45° to the right for angled cuts
   Large 13-1/2" x 23-1/2" stationary
  table with built-in 2-1/2" dust chute
- for dust collector hook-up Comes with five 5" pinless blades, foot switch, replacement blade tension lever kit and adjustment hex. key





EXCELSIOR

Built-in dust blower system

EXCELSIOR



**OPTIONAL** 

Pedal

XL-100

Switch

### STAND

SS-1621XL For Models: XL-16 & XL-21/100



**OPTIONAL** 

STAND SS-30XL

For Model:

XL-30/100





## **ROUTER TABLE KIT**

XL-200MEP

• XL-080- Router Table Fence

Kit includes:

• XL-049- MDF Table • XL-114- Phenolic Router Insert Plate



## **PROFESSIONAL SCROLL SAW** XL-30/100

- Professional quality scroll saw with 1.3 Amp DC motor
- Variable speed (400-1550 strokes/min)
- Tool free blade change system with blade holde whichaccept standard 5" pinless blades
- wincindeced standard 3° pinness staded up to 45° to the right for angled cuts

   Large 14" x 32-1/2" stationary table with built-in 2-1/2" dust chute for dust
- collector hook-up Comes with five 5" pinless blades, foot switch, replacement blade tension lever kit and adjustment hex. key



## Built-in dust blower system

## ACCESSORIES

## 4 PC. INSERT RING KITS

XL-074

XL-076 Zero Clearance



## ROUTER REDUCER COLLARS

XL-314

XL-312 3-1/2"



### 32" x 24" MDF **ROUTER TABLE**

11-3/4" x 9-1/4" table opening

**ROUTER TABLE** XL-075

table opening

32" x 24" CAST-IRON



## 36" DELUXE ROUTER TABLE

XL-080



## PHENOLIC ROUTER **INSERT PLATE**

XL-114

• 11-3/4" x 9-1/4"



## **UNIVERSAL DUST COLLECTION KIT**

XL-130

 Access door, air vent, power cord clamp, 4" dust chute with 2-1/2 side inlet and dust hose

## **ROUTER LIFT WITH HEIGHT LOCK**

XL-125

Heavy-duty construction with 11-3/4" x 9-1/4" anodized aluminum



### **FLOOR STAND WITH SWITCH**

XL-085

120V receptacle to connect



## HOLLOW CHISEL MORTISERS & BORING MACHINE

# 1/2" HOLLOW CHISEL MORTISER WITH 4 PC CHISEL SET

- Powerful 1/2 HP enclosed fan cooled ribbed body motor
- · Gas head cylinder for smooth and controled cuts

 Comes complete with 4 pc. 3/4" shank chisel and bit set (1/4", 5/16" 3/8" & 1/2"), 1/2" chuck and key, hold down and 4 hex. keys



13 SPINDLE LINE BORING MACHINE

- Powerful 1.5 HP 110V motor
- Designed for simultaneous multi-hole line boring or drilling, ideal for cabinet makers or shelving applications
- 13 spindles spaced 1-1/4" on centre, allowing drilling up to 13 evenly spaced holes

  • Fully adjustable aluminum fence with work
- stops at each end to line up workpiece from the right or left to perform parallel boring patterns

 Indexing pins allow correct spindle alignment for resuming line boring operations in long workpieces



KING

STAND INCLUDED

**BLUM® HINGE BORING** HEAD ATTACHMENT

- Blum style 45mm-9.5mm three-hole pattern
- 3 spindle heads (rotation-2 left/1 right) · Can be used with or without the
- 8mm boring bits Comes with 35mm hinge bring bit, 8mm boring

bits (1 left/1 right), link-bar and adjustment





Adjustable fence work stops and extension work stops

31-1/2" x 15-3/4" melamine table top

**OPTIONAL** STAND

## 5/8" HOLLOW CHISEL MORTISER WITH TILTING HEAD **OPTIONAL**

STAND

SS-1050ST

MA-1050ST

• Powerful 3/4 HP • Includes sleeve adaptors which accept 5/8" and 3/4" diameter chisel shanks

KING

 Comes complete with mortising chisel and bit set (1/4", 5/16", 3/8" & 1/2"), 1/2" chuck and key, column mounted hold down pair of 9 position table



1"HOLLOW CHISEL MORTISER WITH TILTING HEAD MA-1075ST

- Powerful 1 HP 110V/220V dual votage motor
- 1/4" to 1" chisel and bit capacity
- Large longitudinal and transversal 19" x 12-1/2" sliding table prevents unnecessary repositionning and reclamping of the workpiece
- · Gas head cylinder for smooth and controled cuts
- Rack and pinion gears move entire head for maximum leverage and positive feed control
- Adjustable depth and height stops
- Accept 5/8" and 3/4" diameter chisel shanks
- · Includes chisel adaptor bushings which accept 5/8" and 3/4" diameter chisel shanks

Comes complete with mortising chisel and bit set (1/4", 3/8", 1/2" & 3/4"), chisel adaptor bushings, 1/2" chuck and key



Head tilts from 0° to 30° to the right and left for angle mortise cuts

Table height from floor becomes 32"

# **KING**DRILL PRESSES & ACCESSORIES





MA-51

Kit comes with chisel holder, holddown arms, holddown bracket, fence, ring bushing adaptors, 4 pc. 1/2" shank mortising chisels & bits and carrying case



## Drill Press VISES

PV-3

\$1<u>5</u>,%

CPV-4

\$19.99

KPV-5 5" \$29.99

KPV-6

\$39.99

## **Cross slide VISES**

Makes lateral or longitudinal adjustments simple

KCV-4N \$59.99

KCV-5N \$79,99

KCV-6N \$99.99





## PLANERS with SPIRAL

Θ

BUILT-IN MOBILE BASE

⊕

## 15"PLANER WITH SPIRAL CUTTERHEAD

### KC-390FX

- Powerful 3 HP motor
- A spiral cutterhead makes 50% less noise than a conventional cutterhead
- · Anti-kickback fingers in front of the infeed roller to prevent wood kickback Magnetic safety switch
- Comes complete with cabinet stand and 4" dust collector outlet

4 Row spiral cutterhead with 64 replaceable cutter inserts





## 20"PLANER WITH **SPIRAL CUTTERHEAD**

- Powerful 3 HP 19 Amp 220V motor
- A spiral cutterhead makes 50% less noise than a conventional cutterhead
- Anti-kickback fingers in front of the infeed roller to prevent wood kickback
   Comes with 5" dust chute for
- dust collector hook-up

4 Row spiral cutterhead with 92 replaceable







KC-630FX-2 25.1/12.6 Amp. @ 220V -440V

## KC-630FX-6 9.6 Amp. @ 600V

- Powerful 10 HP motor 50% quieter
- Variable speed control sets the feed speed · Spiral cutterhead is driven by 3 V-belts
- Magnetic safety switch

Comes complete:
With 6" dust collector outlet, 1/4" air screwdriver, air regulator with pressure gauge, set of 5 replacement cutter inserts, 10 replacement cutter insert screws, 5 T20 Torx bits, 5 T20 Torx screwdrivers. T-bar for Torx bits and hex. kevs





## 10 PC. CARBIDE CUTTER INSERT KITS

on all 4 sides

On all 4 sides
 Cutter size: 14.7mm
 x 14.7mm x 2mm
 Fits: KC-75FX, KC-85FX,
 KC-125FX, KC-390FX



KW-104
• Carbide inserts cut on all 4 sides
Cutter size: 15mm x 15mm x 2.5mm Fits: KC-525FX, KC-530FXR

KING



### **EXTENDABLE & FLEXIBLE CONVEYOR ROLLER TABLE**

- KRRS-109
   Extends from 19" to 52"
- Raises from 24" to 45"
- 300 Lbs. max. capacity



## **FOLDING ROLLER STAND** KRS-102

- · Stand height is adjustable from
- 27" to 44" • 11-3/4" Roller
- width Folds flat for storage

## 3 in 1 FOLDING **ROLLER STAND** KRS-108

- Easily change from a roller, omni-directional or a flat support
- Stand height is adjustable

251/27x287

- from 27" to 44" • 11-3/4" Roller width
- Folds flat for storage



## PLANER / MOULDER

## 7" INDUSTRIAL PLANER / MOULDER Θ

## KC-240M

- Powerful 2 HP, 220V motor
- Magnetic safety switch
  4" Dust chute for dust
- collector hook-up Includes
- adjustable guide fence system for moulding, elliptical jig assembly, adjustment wrenches



## 13" PLANER / MOULDER

### KC-235PM

- Powerful 1.5 HP motor
- Double drive belt system
  Comes complete with stand, planing knives setting gauge and 4" dust chute for dust
  - collector hook-up 6 1/8" max. planing





H.S.S. PLANER KNIVES

13" \$54.99<sub>15</sub>" \$779.99 KKC-13PM KKC-15 KKC-20

15" PLANER

KC-382CFX • 3 HP motor

6" max planing

2 speed autofeed

setting gauge and 4'
dust collector outlet

Includes cabinet stand, planing knife,

thickness

KKC-20

KING

## 13" PLANER WITH **HELICAL CUTTERHEAD**

### KC-13HPC

- Powerful 15 Amp. motor with thermal overload protection
- Helical cutterhead with 26 cutter inserts
- Pre-set depth stops for repeat cuts at 1/8", 1/4", 1/2", 3/4", 1", 1-1/4", 1-1/2" and 1-3/4"



## Replacement Helical cutter insert kit (10 pcs)

KW-204 Fits: KC-6HJC & KC-13HPC

## 15" PLANER

- KC-385FX
- 3 HP motor
- 8" max planing thickness
   104-83 cuts per inch
   1 Includes cabinet stand, planing knives, knife setting
   2 speeds (16-20 FPM)
   4 knife cutterhead gauge and 4" dust collector outlet

MOBILE BASE


## 20" HEAVY-DUTY PLANER

- KC-520C 3 HP (220V) motor

- 8" max. planing thickness





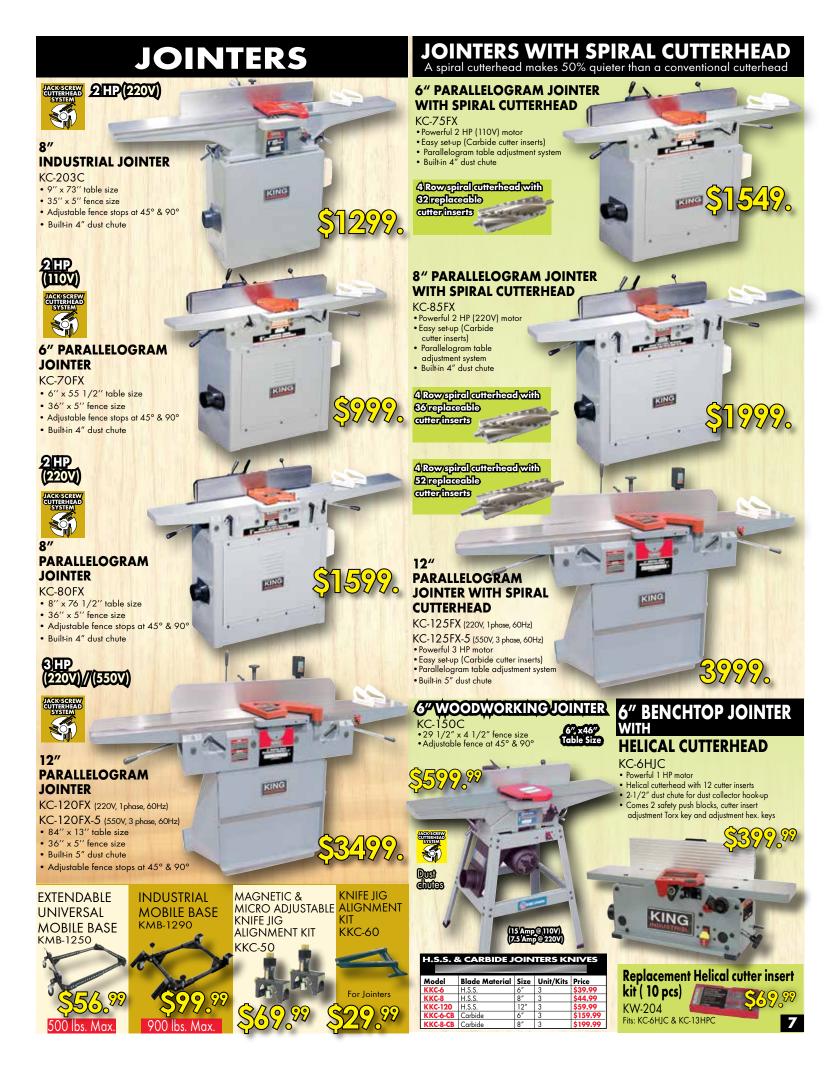



## OSCILLATING EDGE SANDERS **ACCESSORIES**

Belt Size Grit Unit Price

## 6" x 89" OSCILLATING

## **EDGE SANDER**

- KC-689-OSC-7 Sturdy cabinet stand
- · 4" Dust chute
- · Quick helt release lever
- Comes with miter gauge, table guide and end table



## 6" x 108" EDGE SANDER

## CT-108C

- 2 HP motor Table size: Front 37" x
  7 3/4", Side 19" x 12"
  Fully tilting front table
- 4" Dust chute
- · Magnetic safety switch

## 6" x 108" OSCILLATING EDGE SANDER 6"x 108" SANDING BELTS

### KC-108-OSC

- Powerful 2 HP motor
- Oscillating sanding belt Balanced 7" rubber drive wheel and 3" crown idler wheel provide uniform belt tracking

  • End table allows curved sanding operations
- 4" Dust chute for dust collector hook-up
- Magnetic safety switch



Easy and convenient belt tension and tracking adjustment





Two 5" aluminum sanding drums are precision balanced and driven by 2 V-belts

## **16" OPEN DRUM SANDER**

## KC-1632DS

- 10 Amp. moto
- Drum speed: 1,720 RPM2 1/2" dust chute
- · Conveyor belt tracking is easy to adjust
- Easy clamping sanding belt loading systemA metric and imperial
- depth scale is provided for thickness adjustment







## OSCILLATING SPINDLE SANDERS & ACCESSORIES



24 1/4"x24 1/4"

cast iron titling table

 1" to 4" rubber drums can be fitted on both ends for full use of the entire spindle

KING

- · 4" Dust chute for dust collector hook-up
- Heavy-duty oil bath gearbox
- Heavy-duty oil barn gearbox with oil level sight gauge
  10 interchangeable spindles (1/4" x 5", 3/8" x 6", 1/2" x 6", 5/8" x 6", 3/4" x 9", 1" x 9", 1" x 9", 1" x 9", 1" x 9" and 4" x 9")
  Includes 3 interchangeable
  Includes 3 interchangeable
- table inserts and adjustment keys

1599.





| Model      | Sleeve Size | Grit | Units/Kits | Price  |
|------------|-------------|------|------------|--------|
| SL-525-80  | 5" x 1/4"   | 80   | 1          | \$4.99 |
| SL-525-120 | 5" x 1/4"   | 120  | 1          | \$4.99 |
| SL-638-80  | 6" x 3/8"   | 80   | 1          | \$4.99 |
| SL-638-120 | 6" x 3/8"   | 120  | 1          | \$4,99 |
| SL-612-80  | 6" x 1/2"   | 80   | 1          | \$4.99 |
| SL-612-120 | 6" x 1/2"   | 120  | 1          | \$4.99 |
| SL-658-80  | 6" x 5/8"   | 80   | 1          | \$4.99 |
| SL-658-120 | 6" x 5/8"   | 120  | 1          | \$4.99 |
| SL-934-80  | 9" x 3/4"   | 80   | 1          | \$4.99 |
| SL-934-120 | 9" x 3/4"   | 120  | 1          | \$4.99 |
| SL-910-80  | 9" x 1"     | 80   | 1          | \$4.99 |
| SL-910-120 | 9" x 1"     | 120  | 1          | \$4.99 |
| SL-915-80  | 9" x 1 1/2" | 80   | 1          | \$5.99 |
| SL-915-120 | 9" x 1 1/2" | 120  | 1          | \$5.99 |
| SL-920-80  | 9" x 2"     | 80   | 1          | \$6.99 |
| SL-920-120 | 9" x 2"     | 120  | 1          | \$6.99 |
| SL-930-80  | 9" x 3"     | 80   | 1          | \$8.99 |
| SL-930-120 | 9" x 3"     | 120  | 1          | \$8.99 |
| SL-940-80  | 9" x 4"     | 80   | 1          | \$9.99 |
| SL-940-120 | 9" x 4"     | 120  | 1          | \$9.99 |



## BELT & DISC SANDERS & ACCESSORIES

# 6"x 48" BELT & 9" DISC SANDER

- Two 2-1/2" dust chutes with 2-1/2" to 4" adaptor for dust collector hook-up
- Comes complete with miter gauge, 2-1/2" to 4" dust chute adaptor and sturdy enclosed abinet stand









# 6"x 48" BELT & 12" DISC

## KC-788FX

- 1.5 HP belt drive motor
- Sturdy cabinet stand
- Quick belt release lever
- Heavy duty cast iron tables











## CYCLONE DUST COLLECTORS & ACCESSORIES



2 stage filtration, one disposable electrostatic 5 microns outer filter and 1 micron inner two pocket filter



### KAC-1050

- Air suction capacity of 556, 702,1050 CFM
- 2 stage filtration, one disposable electrostatic 5 microns outer filter and 1 micron inner three pocket filter



1400

- 3 Amp. motor
- Air suction capacity of 950, 1085,1050 CFM
  2 stage filtration, one disposable electrostatic 5
- microns outer filter and 1 micron inner three pocket filter



KC-3105C/KDCF-3500

- Noise level reading at 36": 66-77 Db
  Static pressure (inch of water): 9.5
- Dust port opening: 2 x 4" / 1 x 6"

KC-3109C/KDCF-3500

- Noise level reading at 36": 66-77 Db Static pressure (inch of water): 9.5
- Dust port opening: 2 x 4" / 1 x 6"

- KC-4045C/KDCF-3500
   Noise level reading at 36": 75-85 Db
   Static pressure (inch of water): 11.8
   Dust port opening: 3 x 4" / 1 x 8"





| 152 1/8" WOOD CUTTING BANDSAW BLADES |          |       |     |           |         |  |  |
|--------------------------------------|----------|-------|-----|-----------|---------|--|--|
| Model                                | Length   | Width | TPI | Thickness | Price   |  |  |
| KBB-2114-6                           | 152 1/8" | 1/4"  | 6   | .025"     | \$29.99 |  |  |
| KBB-2138-6                           | 152 1/8" | 3/8"  | 6   | .025"     | \$29.99 |  |  |
| KBB-2112-4                           | 152 1/8" | 1/2"  | 4   | .025"     | \$29.99 |  |  |
| KBB-2134-3                           | 152 1/8" | 3/4"  | 3   | .032"     | \$35.99 |  |  |
| KBB-2110-2                           | 152 1/8" | 1"    | 2   | .032"     | \$35.99 |  |  |

| 131 5/8" WOOD CUTTING BANDSAW BLADES |          |       |     |           |         |  |  |
|--------------------------------------|----------|-------|-----|-----------|---------|--|--|
| Model                                | Length   | Width | TPI | Thickness | Price   |  |  |
| KBB-1714-6                           | 131 5/8" | 1/4"  | 6   | .025"     | \$22.99 |  |  |
| KBB-1738-6                           | 131 5/8" | 3/8"  | 6   | .025"     | \$22.99 |  |  |
| KBB-1712-4                           | 131 5/8" | 1/2"  | 4   | .025"     | \$22.99 |  |  |
| KBB-1734-3                           | 131 5/8" | 3/4"  | 3   | .025"     | \$29.99 |  |  |
| KBB-1710-2                           | 131 5/8" | 1"    | 2   | .032"     | \$29,99 |  |  |

ood cutting blade, 1/2" x 10 TPI metal cutting blade, laser guide, work lamp, miter gauge and a precision "TRU-RIP" aluminum rip fence

| 112" WOOD CUTTING BANDSAW BLADES |        |       |     |           |         | 153-1/2"" WOOD CUTT |          |     |  |
|----------------------------------|--------|-------|-----|-----------|---------|---------------------|----------|-----|--|
| Model                            | Length | Width | TPI | Thickness | Price   |                     | Length   | Wi  |  |
| KBB-1514-6                       | 112"   | 1/4"  | 6   | .025"     | \$19.99 | KBB-1814-6          |          | 1/4 |  |
| KBB-1538-6                       | 112"   | 3/8"  | 6   | .025"     | \$19.99 |                     | 153-1/2" | 3/8 |  |
| KBB-1512-4                       | 112"   | 1/2"  | 4   |           | \$19.99 |                     | 153-1/2" | 3/4 |  |
| KBB-1534-3                       | 112"   | 3/4"  | 3   | .025"     | \$29.99 | KBB-1810-2          |          | 1"  |  |
| KBB-1510-2                       | 112"   | 1"    | 2   |           | \$29.99 | KBB-1810-2          |          | 1.1 |  |
|                                  |        |       | -   | 1.002     | T-///   | 1023-2              | 1100-1/2 | 100 |  |

## TING BANDSAW BLADES idth TPI Thickness Price 1/4" 1.3 .032

## **WOOD BANDSAW**

## KC-2102FXB

- 2 speeds (1890/3800) SFPM
- Rack and pinion height adjustment system

## Miter gauge system

## 17" **WOOD BANDSAW**

## KC-1702FXB

- 2 speeds (1600/3300) SFPM
- Rack and pinion height adjustment system
- Miter gauge system

## 17" **VARIABLE SPEED** WOOD/METAL **CUTTING BANDSAW**

### KC-1700WM-VS

- Variable speeds (wood): 540-3600 SFPM

- Variable speeds (metal): 100-650 SFPM

Blade speed digital readou

Voltage (input power): 220V, 1 phase, 60 Hz

## 14" WOOD **BANDSAW WITH** 12"RESAW CAPACITY

## KC-1502FXB

- · 2 speeds (2300-3250) SFPM
- Motor, blade, miter gauge and precision "TRU-RIP" aluminum rip fence with resaw guide included



## **DELUXE 18" WOOD BANDSAW**

### KC-1802FXB

- · 2 speeds (2820, 3936) SFPM
- Motor, blade, miter gauge and precision "TRU-RIP" 6" resaw rip fence included included



2-4" dust chutes

21"x21" cast fron table Tilts 10° to the left &45° to the right

> 16Amp.@110V 8Amp.@220V Pre-wired to 110V

2-4" dust chutes

17 XIV cast iron table Tilts 10° to the left

> 14Amp.@ 110V 7/Amp.@ 220V Pre-wired to 220V

2-4" dust duties

23 1/2" x 17" cast iron table Tilts 5° to the left & 45° to the right

7/Amp.@220V

**699** 



B 2-4" dust chutes

18"xx18" cast iron table Tilts 5° to the left & 45° to the right

12.8Amp.@110V 6.2Amp.@220V

Pre-wired to 110V

foot brake







Safety foot brake

## WOOD LATHES & ACCESSORIES

## 10" 16" WOOD LATHE

- All precision-machined cast-iron bedway
- 6 speeds (480, 1270, 1960, 2730, 3327, 4023) RPM
- 1/2 HP motor
- Complete with MT#2 live center, MT#2 spur center,



## 12"x 18" VARIABLE SPEED WOOD LATHE

**FORWARD & REVERSE FUNCTION** 

• Reliable single board computer microprocessor for precise control Variable speed from 450-3,800 RPM · Precise spindle speed digital readout 24 indexing positions with spindle lock
Comes complete with 3" faceplate, performance **DC** motor

6" & 12" tool rests with 5/8" post diameter, MT#2 spur centre and MT#2 heavy-duty live centre, safety goggles, knock-out rod, tool storage rack, screwdriver and 4 hex. keys

KING

KWL-1218VS

## OPTIONAL

BED EXTENSION EXT-1218VS

Bed extension increases the spindle turning capacity to 44"

## 14"X43" VARIABLE SPEED WOOD LATHE WITH DIGITAL READOUT

KWL-1443VS

- Spindle tachometer with digital readout
- Variable speed from 600 2,400 RPM
- Pivoting headstock turns 180°
- Quick release headstock, tailstock and tool rest assembly for easy adjustments
  - Comes complete with 6" face plate, 12" tool rest with offset and base, MT#2 headstock and tailstock



## WOOD LATHE SAFETY GUARD KING KING 16 23 43 WOOD LATHEWITH ELECTRONIG VARIABLE SPEED KWL-1643ABC Powerful 2 HP, 220V, 3 phase motor with 110V, single phase input power converter Electronic inverter controls the variable speed range from 45 - 3,750 RPM Headstock swivels 360° with positive stops at 45°, • 36 x 10° indexing positions Comes complete with 6" face plate, 14" tool rest with offset and base, MT#2 headstock spur and tailstock live centres, knock out bar and adjustment wrenches

## 4 JAW /4" WOOD LATHE CHUCK

KW-100 Fits models KWL-1016C, KWL-1218VS & KWL-1443VS

KW-200

 Adapts to 1" x 8 TPI wood lathe chuck



KPRO-08

Long 10" hard wood handles



## 12" DOVETAIL JIG

K-2796

Handles materials from 5/16" to 1 1/4" thick and widths up to 12'



### MAGNETIC SWITCHES Comes with 2

Comes with twist lock emergency stop button

KMAG-220-1721

KMAG-110-811 110V (8-11 Amp.) KMAG-110-1114 110V (11-14 Amp.) KMAG-110-1417 110V (14-17 Amp.) KMAG-220-811 220V (8-11 Amp.) KMAG-220-1114 220V (11-14 Amp.) KMAG-220-1417



## **NAILERS & STAPLERS**

## 23 GA. X 1 3/8" HEADLESS PIN NAILER KIT

**8223PN**• 1/2" to 1-3/8" Pin range

· Comes with 1/4" Air inlet, 2 removable non-marring tips, oiler, hex. keys and sturdy carrying case



## 23 GA. X 2" HEADLESS PIN **NAILER KIT**

### 8251PN

1/2" to 2" Pin nail range
Comes with 1/4" Air inlet, 2 removable non-marring tips, oiler, hex. keys and sturdy carrying case





## 21 GA. X 1/2" CROWN UPHOLSTERY

## **NAILER KIT** 8201N

- 3/4" to 2" Nail range
- Comes with 1/4" air inlet, oiler, hex. keys, & sturdy carrying case





## • 1/4" to 5/8" Staple range • Comes with 1/4" air inlet, oiler, hex, keys, & sturdy carrying case

**STAPLER KIT** 

81215



# 18 GA. X 1" NARROW CROWN ADJUSTABLE AIR DEFLECTOR

3/8" to 1" Staple range Comes with 1/4" air inlet, oiler, hex. keys, & sturdy carrying case



## 2-1/2" X 16 GA. BRAD NAILER KIT 8225NL

3/4" to 2 1/2" Nail range
Comes with 1/4" air inlet, oiler, hex. keys,





2" FLOORING STAPLER/

**2**m 1

3fm 1

GUPAT KVATUER KAIT

• 1" to 2" Staple range

Comes with mallet, 1/4"

air inlet, safety glasses,

oiler, hex. keys & sturdy

• 1 1/2" to 2" Cleat

carrying case

8260FSN-2

## GUEAT NATUER W

## 8266FSN-3

- 1 1/2" to 2" staple
- range 1 1/2" to 2" "L" & "T" cleat nail range
- Comes with nylon-fibreglass mallet, 1/4" air inlet, safety glasses,
- oiler, hex. keys & sturdy carrying case

### 16 GA. X 2" MEDIUM CROWN ADJUSTABLE AIR DEFLECTOR **STAPLER KIT**

### 8216S-2

- 3/4" to 2"
- Staple range Comes with 1/4" air inlet, oiler,
- hex. keys, & sturdy carrying case



## 2 IN 1-18 GA. NAILER/STAPLER KIT

## 8210NS

- 18 Ga. x 1/4" (3/8" to 1 5/8") stapler 18 Ga. (3/4" to 2") nailer Comes with 1/4" air inlet, oiler, hex. keys and sturdy carrying case





## GUPPED HEAD FRAMING NAILER

8228N Shoots standard 2 3/16" - 3 9/16",,



## 8234N

Shoots standard 2 3/16" - 3 9/16", 34° nails





## **COIL ROOFING NAILER KIT**

### 8245RN

- 7/8" to 1 3/4" (11 Ga.)
- Comes with 1/4" air inlet, debris shield, safety glasses, oiler, hex. keys and sturdy carrying case



## **20 C**dlon tank

## 5 PEAKHP AIR COMPRESSOR

## 8498

- Durable oil lubricated pump
- 7.4 SCFM @ 40 PSI
- 5.7 SCFM @ 90 PSI
- Air Pressure Regulator and easy to read Pressure Gauges



# ARCTIC FLEX AIR COMPRESSORS & ACCESSORIES

## RETRAGIABLE AIR HOSE REELWITH HYBRID POLYMERAIR HOSE



K-5038FR 50 ft. x 3/8" All-Weather Flexibility (-40°C to 65°C) Comes with wall mounting

## MANUAL AIR HOSEREEL WITH HYBRID POLYMERAIR HOSE



K-10014FRL 100 ft. x 1/4" All-Weather Flexibility (-40°C to 65°C) 360° swivel base

### HYBRID POLYMER (-40°G INDUSTRIALAIRHOSES

**300 PSI MAXIMUM PRESSURE** 

|                   | HYBRID POLYMER INDUSTRIAL AIR HOSES |             |         |  |  |  |  |
|-------------------|-------------------------------------|-------------|---------|--|--|--|--|
| ALC: NO.          | K-2514H                             | 25' x 1/4"  | \$19.99 |  |  |  |  |
| AG FACE           | K-2538H                             | 25' x 3/8"  | \$26.99 |  |  |  |  |
| The second second | K-5014H                             | 50' x 1/4"  | \$29.99 |  |  |  |  |
| - 3               | K-5038H                             | 50' x 3/8"  | \$39.99 |  |  |  |  |
|                   | K-10014H                            | 100' x 1/4" | \$49.99 |  |  |  |  |
|                   | K-10038H                            | 100' x 3/8" | \$59.99 |  |  |  |  |
|                   |                                     |             |         |  |  |  |  |

## PREMIUM HYBRID POLYMER GARDEN HOSES



K-5058GH  $5/8" \times 50 \text{ ft.}$ K-10058GH  $5/8" \times 100 \text{ ft.}$ 

**Extreme All-Weather Flexibility Kink resistant** 

## **ULTRA-QUIET OIL-FREE** AIR COMPRESSOR

## KC-1410A

- Only 60 decibels
- Durable oil-free pump with minimal maintenance
- 1.8 CFM @ 40 PSI, 1.2 CFM @ 90 PSI
- 125 PSI maximum tank pressure
- ASME safety valve
- 1/4" universal "one touch" quick connect coupler

## **ULTRA-QUIET OIL-FREE** AIR COMPRESSOR

### KC-4620A

- 3.80 CFM @ 40 PSI
- 2.35 CFM @ 90 PSI
- Extra long pump life of over 3000 hours
- 120 PSI maximum tank pressure
- ASME safety valve


4.6 GALLON

2HP(PEAK)(60 Decibels)

## 5.5 PEAK HP 20 GALLON AIR COMPRESSOR

### KC-2051H1

- 150 PSI max pressure
- 7.6 CFM @ 40 PSI



## 6.5 HP GAS WHEELBARROW AIR COMPRESSOR

### KC-6510G1

- 150 PSI max pressure
- 14.1 CFM @ 40 PSI
- 11.2 CFM @ 100 PSI

(Property)

10 GALLON TWIN TANKS (2X5 GALLONS)

-127

ASME safety valve





## K-1630

15" flexible rubber hose with lever style chuck, rubber protected 2-1/2" diameter pressure gauge (pressure range of 10- 170 PSI) and a quick connect 1/4" NPT air inlet

## STATIONARY 6.5 PEAK **HP 60 GALLON AIR** COMPRESSOR

### KC-6160V1

• 150 PSI max pressure

- 13.4 CFM @ 40 PSI
- 11.2 CFM @ 90 PSI
- High efficiency reed valves



## **HIGH OUTPUT 6.5 PEAK HP 60 GALLON AIR** COMPRESSOR

## KC-5160V1

- 150 PSI max pressure
- 22.6 CFM @ 40 PSI
- 18.5 CFM @ 100 PSI High efficiency reed valves

<del>6</del>99.

- High output 30 CFM @ 100 PSI • 150 PSI max pressure
  - 43 CFM @ 40 PSI

KC-7180V1-MS

- 30 CFM @ 100 PSI
- Heavy-duty 1/2" ball value and easy to read tank pressure gauge

**HIGH OUTPUT 7.5 PEAK HP** 

**80 GALLON AIR COMPRESSOR** 

## 5.5 PEAK HP 24 GALLON AIR COMPRESSOR

## KC-3124V1

- 150 PSI max pressure
- 60 CFM @ 90 PSI





















